


PAROC Marine Slab 40

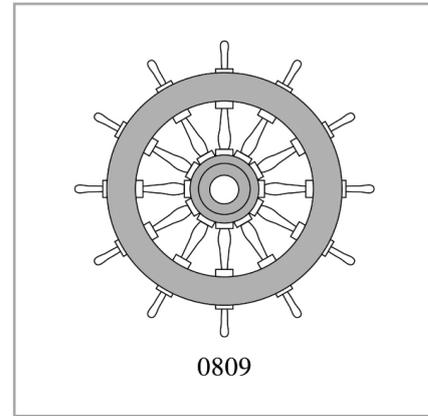

Dimensions and package sizes

Standard dimensions, mm	m ² /pallet	pcs/pallet
50 x 600 x 1200	92,16	128
100 x 600 x 1200	46,07	64

Size of the pallet is 1200 x 2300 mm.

Example of order

PAROC Marine Fire Slab 100 G3,
S1 50

G3= White glass fibre cloth, 400 g/m²

S1 = Positioning of the facing

50 = Insulating material thickness, mm

PAROC Marine Fire Slab 100 G1/N4,
S1/S5 50

G1/N4= White glass fibre cloth, 200 g/m², other side grey glass fibre felt, 60 g/m²

S1/S5 = Positioning of the facing


50 = Insulating material thickness, mm

Please note that minimum delivery is one pallet.

Facings

AluCoat	Reinforced aluminium foil
G1	White glass fibre cloth, ~200 g/m ²
G2	Black glass fibre cloth, ~200 g/m ²
G3	White glass fibre cloth, ~400 g/m ²
G4	White glass fibre cloth + aluminium foil, ~250 g/m ² (cloth on top)
G7	White glass fibre cloth + aluminium foil, ~250 g/m ² (foil on top)
N3	Black non-woven tissue, ~60 g/m ²
N5	Grey non-woven tissue, ~60 g/m ²

Positioning of the facing

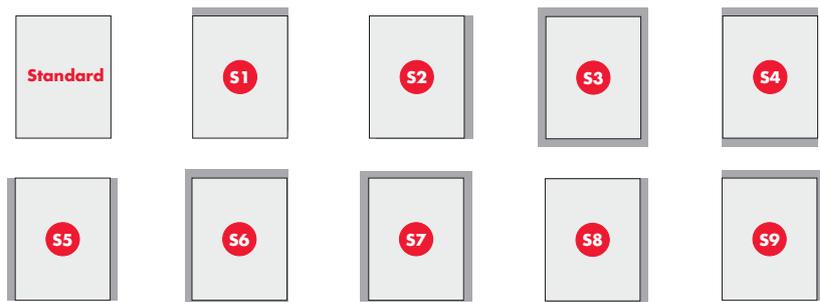

Overlap of the facing is about 30 mm. Overlap measure can vary in special dimensions and if needed for special purposes.

Technical Insulation

Marine ins./Product information

2 - 6.31

March 2008

Replaces: October 2005